

# Cover Roller Swim Spa

## INSTRUCTIONS

### PARTS LIST

DESCRIPTION	QTY
A. Roller Rack	6
B. #10 x 1" Mounting Screws	36


**Additional Supplies:** Power/Cordless Drill with Phillips bit and a tape measure.



**1** Position one **Roller Rack (A)** on the outside end of the spa before the corner radius. The top surface of the rack should be flush with the top of the spa. Mark the position of the rack's 6 screw holes in the skirt.

**2** Repeat this procedure with the second **Roller Rack (A)** on the second arm on the other end of the spa and the third arm in the center. For help on placement, refer to *Figure 1*.

**3** Secure each roller rack to the spa skirt by inserting all six **#10 Mounting Screws (B)** tightly into the screw holes that you marked in steps 1-2 (*Figure 2*). Repeat steps 1-3 on the other side of the spa.

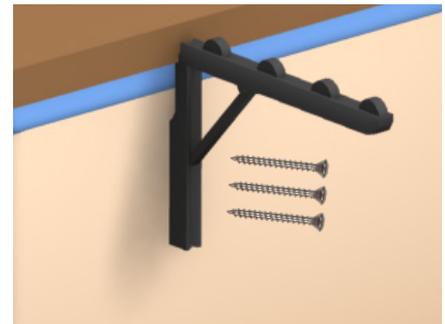

### PRO TIP

It may be required for you to insert a 2" x 4" wood stud behind the spa's cabinet where the position of the Cover Roller Racks are going to be screwed onto the skirt for extra support.

# How to Use

- 1 Lock each of the **Roller Racks** into position by rotating counterclockwise, then securing the bottom edge of the brace (*Figure 1*).





## PRO TIP

Do not extend the roller rack arm more than 90° upward, or damage to the joint may result.

- 2 Flip one cover half over the other. (*Figure 2*)

- 3 Push the spa cover on top of the roller racks. Now, enjoy your spa! (*Figure 3*)

- 4 When done, push the folded spa cover back over the spa, then flip the upside half back onto the spa. Release the braces & rotate each roller rack clockwise to the rest position. (*Figure 4*)

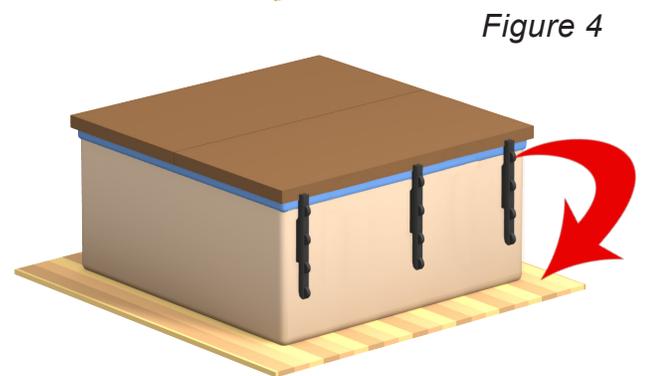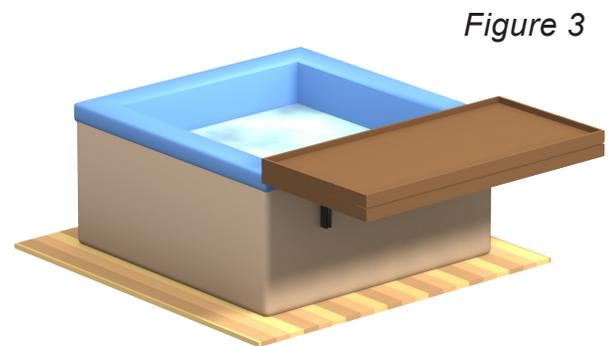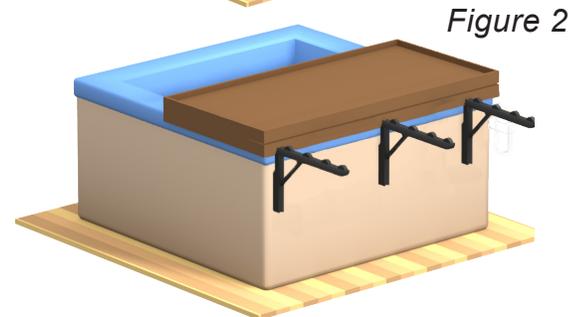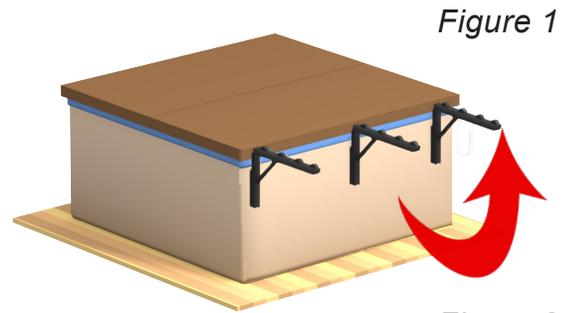

# Warnings

- **DO NOT** sit on open cover. DAMAGE WILL RESULT.
- **DO NOT** mount roller racks on the front or the equipment side of spa. DAMAGE WILL RESULT.
- **DO NOT** twist or move roller racks sideways. DAMAGE WILL RESULT.
- **DO NOT** allow weight resting on the roller system to exceed 75 lbs. DAMAGE WILL RESULT.
- For safety reasons, the roller system should be secured in the lowered position after each use.
- If there is snow on the cover, remove all snow before opening or DAMAGE WILL RESULT.